




Winding Ohmmeter RMO50M

- Lightweight – only 8 kg
- Test current 5 mA – 50 A DC
- Measuring range 0,1 $\mu\Omega$ - 1000 Ω
- Mechanical protection IP43
- Extremely quick measurement

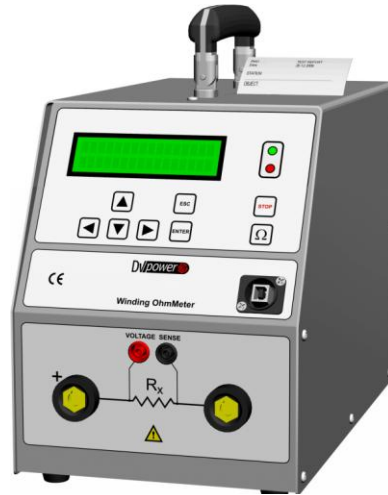

High DC current resistance meter for motors/generators

Description

The Winding Ohmmeter RMO50M is designed for winding resistance measurement of electrical motors and generators. RMO50M generates true ripple free DC current. The test result is displayed as $R=U/I$.

The RMO50M instrument can store up to 100 measurements. All measurements are time and date stamped. Using DV-Win software a test can be performed from a PC, and the results can be obtained directly at a PC. Using DV-Win the result can be arranged as an Excel spreadsheet which can be later shown as a diagram and printed for a report. The RMO50M has very high ability to cancel electrostatic and electromagnetic interference in HV electric fields. It is achieved by very efficient filtration. The filtration is made utilizing proprietary hardware and software.

Typical application

Typical application of RMO50M is measuring the resistance of:

- ✓ Generators and electrical motors
- ✓ High-current busbar joints
- ✓ Cable splices

Accessories

Included

- ✓ DV-Win PC software including USB cable
- ✓ Mains power cable
- ✓ Ground (PE) cable

Recommended

- ✓ Current cables 2 x 5 m 10 mm² with clamps
- ✓ Sense cables 2 x 5 m 2,5 mm² with clamps
- ✓ Transport bags

Optional

- ✓ Built-in thermal printer 80 mm
- ✓ Test shunt 150 A / 150 mV

- ✓ Current cables 2 x 10 m 10 mm² with clamps
- ✓ Sense cables 2 x 10 m 2,5 mm² with clamps
- ✓ Transport case

Technical data

1 - Mains Power Supply

- Connection according to IEC/EN60320-1; UL498, CSA 22.2
- Voltage single phase 110 V – 240 V AC, + 10 % - - 15 %
- Frequency 50/60 Hz

2 - Output data

- Test current 5 mA DC – 50 A DC
- Measuring range / Resolution

0,1 μΩ - 999,9 μΩ	0,1 μΩ
1,000 mΩ - 9,999 mΩ	1 μΩ
10,00 mΩ - 99,99 mΩ	10 μΩ
100,0 mΩ - 999,9 mΩ	0,1 mΩ
1,000 Ω - 99,99 Ω	10 mΩ
100 Ω - 1000 Ω	0,1 Ω

- Typical accuracy ± (0,2 % rdg + 0,2 % FS)

3 - Environmental conditions

- Operating temperature -10 °C - +55 °C / 14 °F - +131 °F
- Storage and transportation -25 °C - +70 °C / -13 °F - +158 °F
- Humidity 5 % - 95 % relative humidity, non condensing

4 - Dimensions and Weight

- Dimensions 198 mm x 255 mm x 380 mm
7,8 in x 10 in x 15 in
(W x H x D) without handle
- Weight 8 kg / 17,6 lb
- Mechanical protection IP43

5 - Safety Standards

- European standards EN 61010-1
LVD 2006/95/EC
- International standards IEC 61010-1
UL 61010-1
CAN/CSA-C22.2 No. 61010-1, 2nd edition, including Amendment 1

6 - Electromagnetic Compatibility (EMC)

- CE conformity EMC directive 2004/108/EC
- Emission EN 61326-1
- Interference Immunity EN 61326-1

Specifications are subject to change without notice.